

OV5116P B&W CMOS CAMERACHIP™ with PAL Analog Output

General Description

The OV5116P is a complete black and white CMOS Video Camera chip. The OV5116P conforms to CCIR/PAL (50 Hz) standards and outputs composite video capable of directly driving a 75Ω display device.

The on-chip auto exposure allows for a wide range of lighting conditions, eliminating the need for external mechanical shutter components. This along with its single supply, low power consumption make the OV5116P an incredibly versatile and cost-effective video camera.



Note: The OV5116P is available in a lead-free package.

Features

- Single chip 1/4" format video image sensor
- CCIR/PAL output
- Selectable mirror image
- Auto gain control (maximum +18 dB)
- High I.R. sensitivity for nighttime applications
- Auto and manual backlight compensation mode
- Gamma correction - ON/OFF
- External frame sync capability
- 40 mW on-chip power consumption
- External data acquisition support
- Smear free
- Auto level expanding
- Optional edge enhancement

Ordering Information


Product	Packages
OV05116-C21A (B&W, PAL)	CLCC-28

Applications


- Security
- Surveillance
- Machine Vision
- Process Control
- CCTV
- Infant Monitoring
- Toys

Key Specifications

Array Size		352 x 288
Power Supply		5 VDC ± 5%
Power Requirements	Without Loading	40 mW
	With 75 ohm Loading	70 mW
Image Area		3.3mm x 2.5mm
Auto Electronic Exposure Time		1/50s - 1/6000s
Minimum Illumination (3000K)		0.5 lux @ f 1.4
S/N Ratio		46 dB (AGC=1x)
Pixel Size		9.1 μm x 8.7 μm
Package Dimensions		0.45 in. x 0.45 in.



Functional Block Diagram

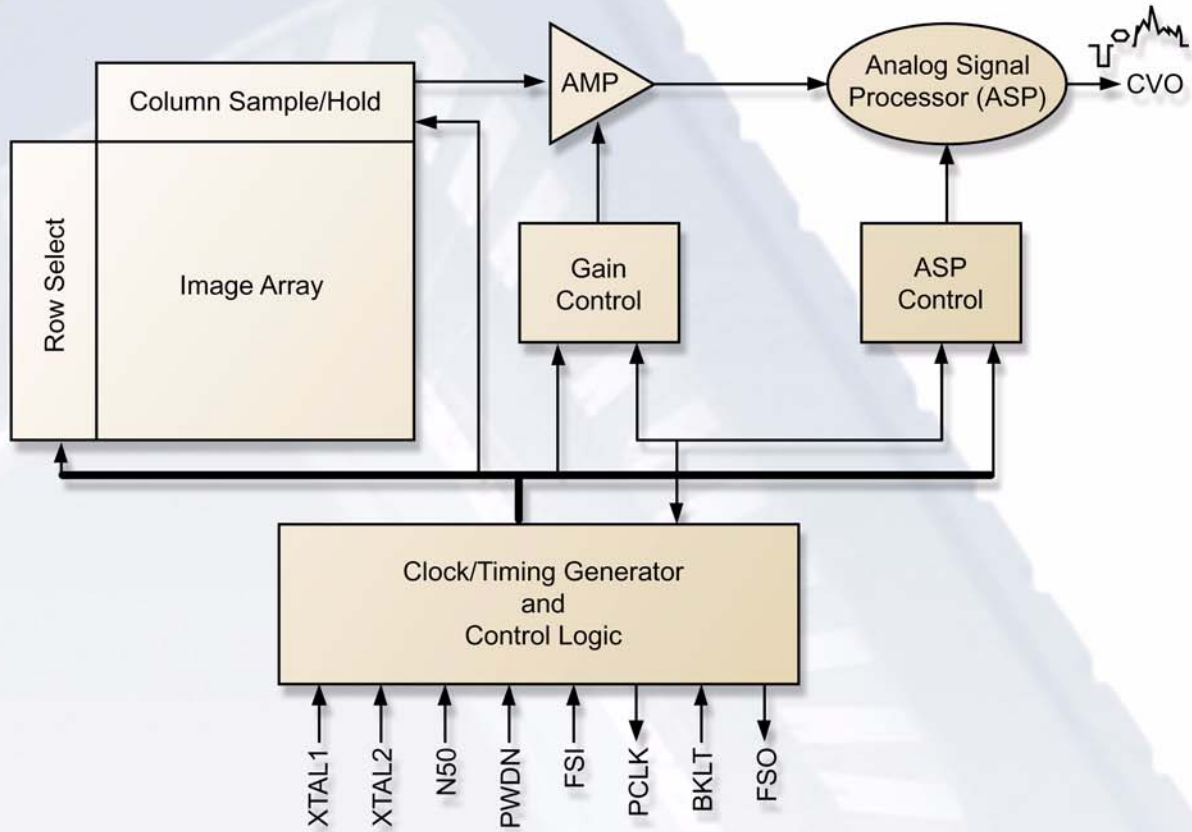

www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. 'OmniVision', the OmniVision logo, 'VarioPixel', and 'OmniPixel' are registered trademarks of OmniVision Technology. All other trademarks are the property of their respective owners.

Version 2.2, 10/18/05

