

## OV7648 Color CMOS VGA (640 x 480) CAMERACHIP™ OV7148 B&W CMOS VGA (640 x 480) CAMERACHIP™

### General Description

The OV7648 (color) and OV7148 (black and white) CAMERACHIPS™ are low voltage CMOS image sensors that provide the full functionality of a single-chip VGA (640 x 480) camera and image processor in a small footprint package. The OV7648/OV7148 provides full-frame, sub-sampled or windowed 8-bit images in a wide range of formats, controlled through OmniVision's Serial Camera Control Bus (SCCB) interface.

This product family has an image array capable of operating at up to 30 frames per second (fps) with complete user control over image quality, formatting and output data transfer. All required image processing functions, including exposure control, gamma, white balance, color saturation, hue control and more, are also programmable through the SCCB interface. In addition, OmniVision CAMERACHIPS use proprietary sensor technology to improve image quality by reducing or eliminating common lighting/electrical sources of image contamination such as fixed pattern noise, smearing, blooming, etc. to produce a clean, fully stable color image.



**Note:** The OV7648/OV7148 is available in a lead-free package.

### Features

- High sensitivity for low-light operation
- 2.5V operating voltage for embedded portable apps
- Standard Serial Camera Control Bus (SCCB) interface
- VGA, QVGA (sub-sampled) and Windowed outputs with Raw RGB, RGB (GRB 4:2:2), YUV (4:2:2) and YCbCr (4:2:2) formats
- Automatic image control functions including: Automatic Exposure Control (AEC), Automatic Gain Control (AGC), Automatic White Balance (AWB), Automatic Brightness Control (ABC), Automatic Band Filter (ABF) for 60Hz noise and Automatic Black-Level Calibration (ABLC)
- Image quality controls including color saturation, hue, gamma, sharpness (edge enhancement), anti-blooming and zero smearing

### Ordering Information


Product	Package
OV7648-K06A (Color, w/ lead)	CSP-22
OV7148-K06A (B&W w/ microlens, w/ lead)	CSP-22
OV7648-KL6A (Color, lead-free)	CSP-22
OV7148-KL6A (B&W w/ microlens, lead-free)	CSP-22

### Applications


- Cellular Phones
- Picture Phones
- Toys
- PC Multimedia

### Key Specifications

	<b>Array Size</b>	640 x 480 (VGA)
<b>Power Supply</b>	<b>Core</b>	2.5VDC ± 10%
	<b>Analog</b>	2.5VDC ± 4%
	<b>I/O</b>	2.25V to 3.3V
<b>Power Requirements</b>	<b>Active</b>	40 mW (30 fps, including I/O power)
	<b>Standby</b>	30 µW
<b>Temperature Range</b>	<b>Operation</b>	-10°C to 70°C
	<b>Stable Image</b>	0°C to 50°C
<b>Output Formats (8-bit)</b>		<ul style="list-style-type: none"> <li>• YUV/YCbCr 4:2:2</li> <li>• RGB 4:2:2</li> <li>• Raw RGB Data</li> </ul>
	<b>Lens Size</b>	1/4"
<b>Maximum Image Transfer Rate</b>	<b>VGA</b>	30 fps
	<b>QVGA</b>	60 fps
<b>Sensitivity</b>	<b>B&amp;W</b>	2.20 V/Lux-sec
	<b>Color</b>	1.12 V/Lux-sec
	<b>S/N Ratio</b>	46 dB
	<b>Dynamic Range</b>	62 dB
	<b>Scan Mode</b>	Progressive/Interlaced
	<b>Maximum Exposure Interval</b>	523 x t <sub>ROW</sub>
	<b>Gamma Correction</b>	0.45
	<b>Pixel Size</b>	5.6 µm x 5.6 µm
	<b>Dark Current</b>	30 mV/s
	<b>Well Capacity</b>	60 Ke
	<b>Fixed Pattern Noise</b>	< 0.03% of V <sub>PEAK-TO-PEAK</sub>
	<b>Image Area</b>	3.6 mm x 2.7 mm
	<b>Package Dimensions</b>	4930 µm x 4760 µm



## Functional Block Diagram

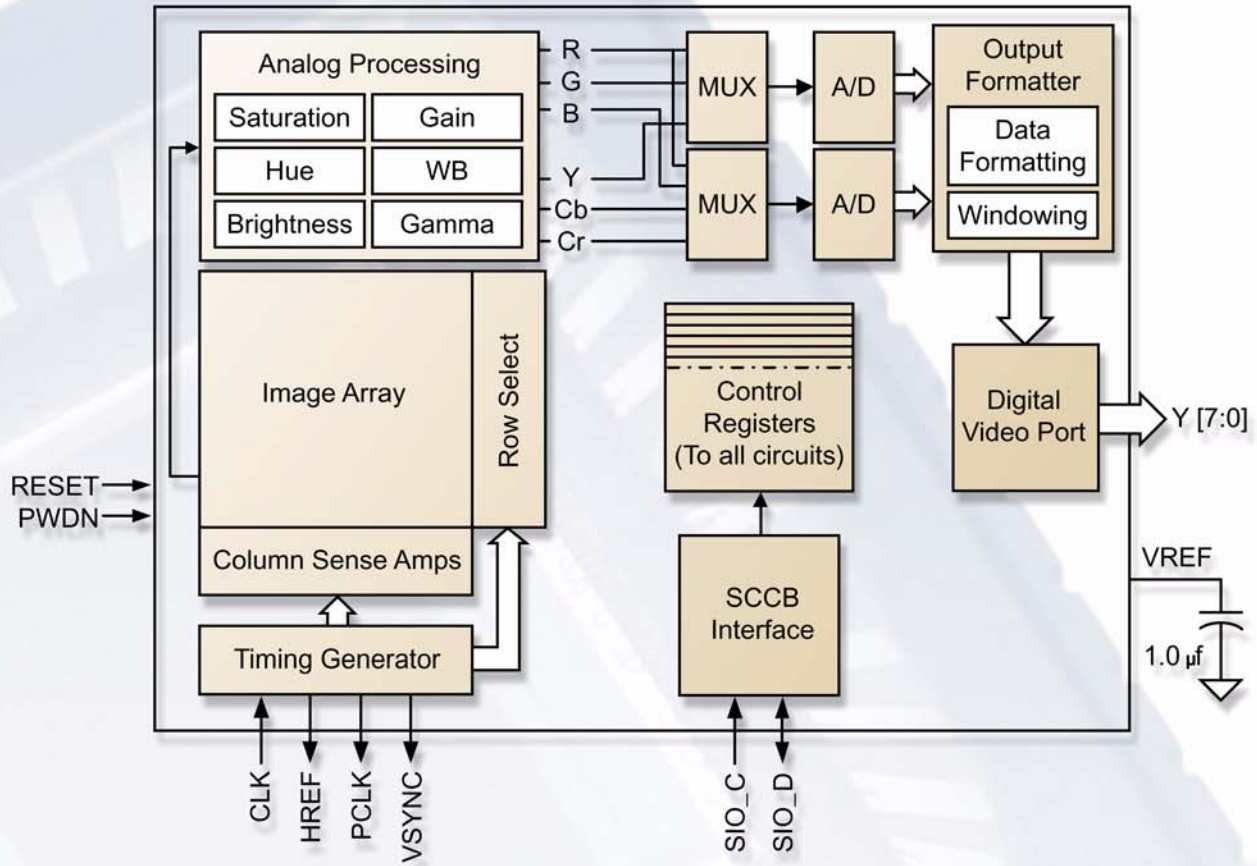

[www.ovt.com](http://www.ovt.com)

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. 'OmniVision', the OmniVision logo, 'VarioPixel', and 'OmniPixel' are registered trademarks of OmniVision Technology. All other trademarks are the property of their respective owners.

Version 1.7, 10/18/05

